


Fibre Channel



FCA2540-CCXMC-FF-G Data Sheet Dual Channel Conduction Cooled Fibre Channel XMC (optical)

FCA2540 Conduction Cooled XMC

The FCA2540 conduction cooled XMC is the 7th generation of Fibre Channel interfaces from Critical I/O. Critical I/O's Fibre Channel interfaces allow system designers to easily integrate Fibre Channel into storage and networking I/O (processor to processor) applications. Critical I/O Fibre Channel products employ a Silicon Stack architecture which completely offloads all protocol processing into dedicated silicon, unlike FPGA-based Fibre Channel products which push the upper layer protocol processing (e.g. FC-SCSI) back onto the host ("software stack"). With industry-leading software capability, a Silicon Stack architecture, and support for industry standard protocols such as SCSI and RDMA, Critical I/O Fibre Channel solutions enable high sustained throughput, ultra-low host processor overhead and very low latency.

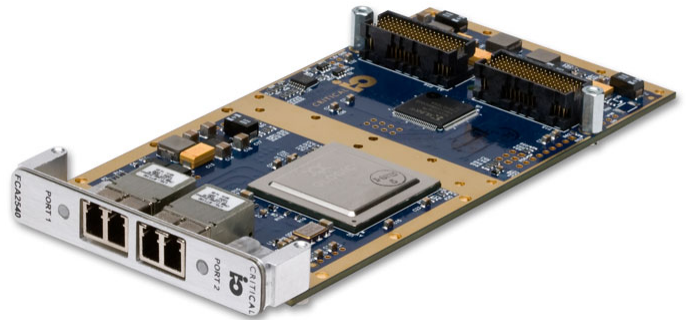

FCA2540-CCXMC-FF-G Features:

- 4/2/1 Gbps dual channel (auto negotiation)
- ccXMC with 8-lane PCI-Express host interface
- 800 MBytes/sec (full-duplex) max rate per channel
- 10 usec latency
- Hardware BIT (Built in Test)
- Low power consumption
- Two front panel optical "low rider" LC connectors
- Comprehensive software library & driver support
- Rugged conduction cooled rear I/O XMC available
- RoHS LEAD FREE

Network Features:


- RDMA protocol support
- SCSI Messaging support (FXLP superset)
- Direct Data Placement into application memory

Storage Features:

- SCSI protocol support
- Initiator & target support

Extensive Software Support & Capability

Critical I/O supplies the hardware, drivers, libraries, and protocol support you'll need for rapid system development without wasting time debugging drivers. The FCA2540 hardware is accompanied by an extensive offering of software library and driver software products with support for real-time OS platforms (as well as mainstream OS platforms) running on a variety of embedded processors (PowerPC, DSP, Intel, etc.).

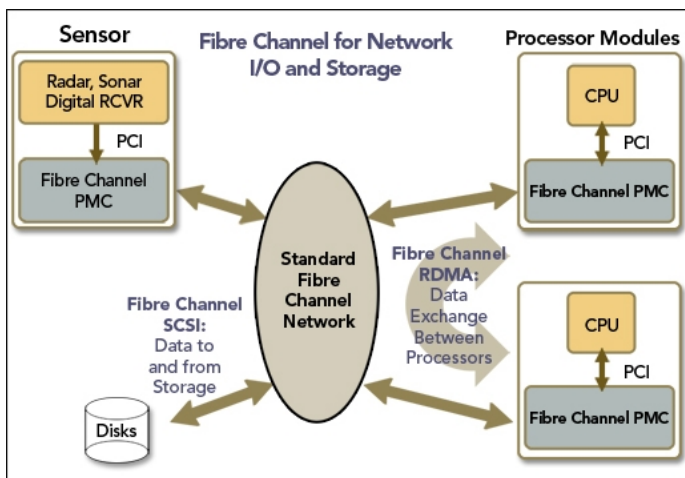


Fibre Channel for Storage & Networking Applications

High Performance / Low Host Overhead

Transfer 1500 MBytes per second of data over a Fibre Channel network with minimal host CPU loading and ultra-low latency with the FCA2540 Fibre Channel conduction cooled XMC. The FCA2540 offers two independent channels of 4 Gbps Fibre Channel in a conduction cooled XMC with 8-lane PCI-Express. Each channel is capable of 800 MBytes/sec and an overall sustained transfer rate of 1500 MBytes/sec. The Critical I/O Fibre Channel Accelerator product family also provides simultaneous support for a multitude of protocols (both networking & storage) and Class 1, 2 & 3 FC Service.

FCA2540 Conduction Cooled XMC (optical) Technical Specifications

Controller Architecture	Highly integrated, low power, single chip dual channel Fibre Channel controller
Fibre Channel Rates	4/2/1 Gbps/channel auto negotiation
Data Transfer Rate	800 MBytes/sec (per channel, full-duplex) 1500 MBytes/sec sustained data rate (aggregate for interface)
Fibre Channel Topology	FC-AL, FC-AL2, point to point, switched fabric (FL_Port and F_Port)
Class of Service	Class 1, 2 and 3 Fibre Channel Service
Protocol Support	SCSI-FCP, FC-IP, RDMA, SCSI Messaging, FXLP and custom protocol support available
Host Bus Interface	PCI-Express 8 lanes Rev 1.0a
Ports	Two optical front panel ports
Connectors	Two optical "low rider" LC connectors
Form Factor	XMC, VITA 42.0, VITA 42.3, ANSI / VITA 20-2001 (R2005)
Power Requirements	+12VDC at 0.9A (max) or +5VDC at 2.2A (max) standard configurations (special factory configuration : +3.3VDC at 3.3A)
Power Consumption	5.5 Watts (typical) with 4-lane PCIe; 6.5 Watts (typical) with 8-lane PCIe
Temperature	Operating "R2 level": -40C to +85C; Storage: -50C to +125C
Vibration	Sine: 10g peak 15-2K Hz; Random: 0.1g ² /Hz 15-2K Hz
Shock	40g peak (11ms duration)
Humidity	Operating: 0-95%, non-condensing; Storage: 0-100%, non-condensing
Supported Host Processors	Intel, PowerPC, DSP, etc.
Software Support	OS Drivers: VxWorks, Linux, Windows, Lynx; FC Software Library (OS independent)
Model Number	FCA2540-CCXMC-FF-G-R2
Model Description	Fibre Channel conduction cooled XMC, 4 Gbit/sec, dual channel, front panel optical "low rider" LC connectors, parylene C conformal coated, R2 rugged = -40C to +85C, RoHS LEAD FREE

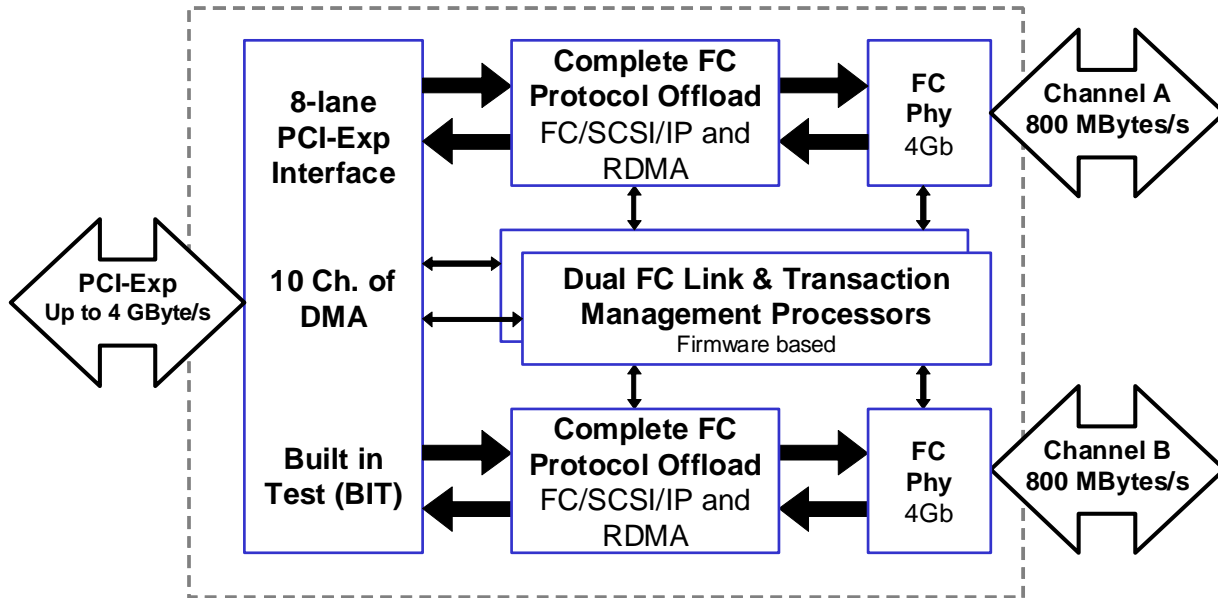

Block Diagram: The FCA2540 CCXMC (front optical) provides two independent 4Gb Fibre Channel ports in a conduction cooled XMC form factor with 8 lane PCI-Express. Each channel employs a full silicon stack offload of the complete protocol stack delivering 800 MBytes/sec on each channel and 1500 MBytes/sec overall sustained throughput with minimal host overhead and ultra-low latency.

